


# Super 5

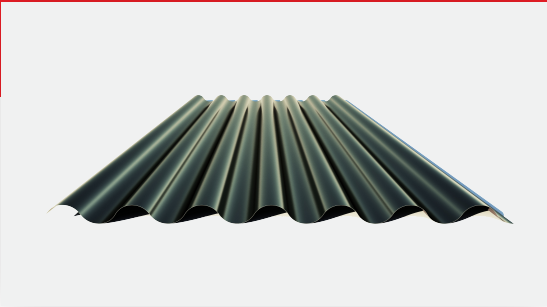

## OVERVIEW

True Oak Super 5 is a 35mm corrugated profile ideal for roofing and walling applications. It is the perfect blend of classic and modern corrugated design technology.


**COVERAGE LENGTH**  
735mm Nominal

**MINIMUM ROOF PITCH**  
2 Degrees

**RIB HEIGHT**  
35mm

**SPRING CURVING**  
2500mm Minimum Radius

## PROFILE

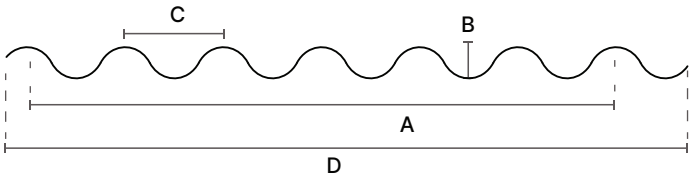

- A = 735.0mm +/- 2mm
- B = 35.0mm
- C = 122.5mm
- D = 844.0mm

\* Visit [revbydesign.com.au](http://revbydesign.com.au) for CAD & Revit Files

## AVAILABILITY

### LOCATION



- AUSTRALIA WIDE
- CYCLONIC

### MATERIAL & GUAGE

- 0.48 BMT
- Zinalume® AM150
- COLORBOND® Steel
- COLORBOND® Steel Ultra
- COLORBOND® Steel Matt
- Heritage Galvanised
- Nexalume™ AZ150
- NEXTEEL NextSTAR™
- NEXTEEL NextSTAR™ Ultra
- NEXTEEL NextSTAR™ Matt

NON-CYCLONIC SPAN TABLE

ROOF SHEETING NON-CYCLONIC SPAN TABLE


ROOF SPAN	0.48 BMT
Single Span	1200
End Span	1800
Internal Span	2400
Unstiffened Overhang	300
Stiffened Overhang	500

WALL CLADDING NON-CYCLONIC SPAN TABLE

WALL SPAN	0.48 BMT
End Span	2700
Internal Span	2700
Unsupported Cantileaver	400*

\* Rivet required, securing the overlap, 50mm from the end of the sheet

SPAN DEFINITIONS

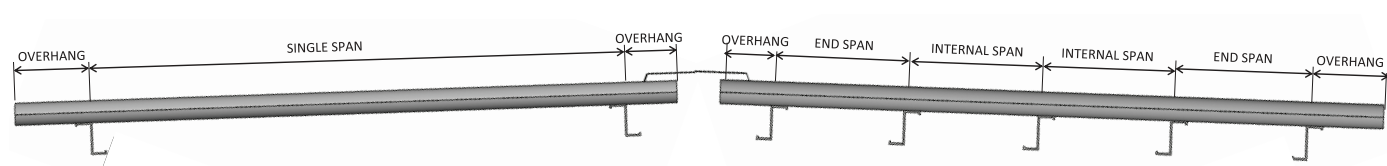

DESIGN PARAMETERS

Region	A	Height	10 metre	Internal Bay	End Bay
		Vz	45 m/sec	K <sub>1</sub> = 1.0	K <sub>1</sub> = 2.0
		q*u	1.215 kPa	ΣC = -0.85v	ΣC = -1.50
		qs	0.821 kPa	Pu = 1.03 kPa	Pu = 1.82 kPa
		Cp.e	-0.65	Ps = 0.70 kPa	Ps = 1.23 kPa
Terrain Category		Cp	0.2		

NON-CYCLONIC SERVICEABILITY & STRENGTH

NON-CYCLONIC TRUE OAK SUPER 5 0.48 BMT					
Non-Cyclonic Wind Uplift Resistance - Service and Strength Limit State Design					
End Span			Internal Span		
Span (mm)	SERVICEABILITY (kPa)	STRENGTH (kPa)	Span (mm)	SERVICEABILITY (kPa)	STRENGTH (kPa)
1200	2.04	6.08	1500	2.06	6.16
1500	1.66	4.60	1800	1.74	4.88
1800	1.35	3.66	2100	1.47	4.02
2100	1.08	3.02	2400	1.24	3.39
2400	0.86	2.56	2700	1.04	2.92

INSULATION OPTIONS

Roof Blanket with a thickness up to 100mm can be installed under True Oak Super 5 without the requirement of a thermal spacer, the length of the fasteners may have to increase to compensate for the thickness of the insulation.

Noting the energy efficiency requirements of non-residential buildings may call for a thermal spacer on blanket of all sizes, this is governed by Section J of the National Construction Code.

## RAINWATER TABLES

Maximum roof lengths (m) for drainage measured from ridge to gutter, no allowance has been made for penetrations or water diversion.

### CROSS SECTIONAL AREA COMPARISON PER PROFILE

EFFECTIVE CROSS-SECTIONAL AREA (m <sup>2</sup> / m)	
Corrugated 16mm	1.249 x 10 <sup>-3</sup>
True Oak 21mm	2.520 x 10 <sup>-3</sup>
True Oak 'Super 5'	6.416 x 10 <sup>-3</sup>
Rev 5	11.85 x 10 <sup>-3</sup>
Rev 5 Plus	15.29 x 10 <sup>-3</sup>
RevKlip 700	13.91 x 10 <sup>-3</sup>
RevSpan 700	4.589 x 10 <sup>-3</sup>

### TRUE OAK SUPER 5 RAINFALL CAPACITY

ROOF SLOPE (DEGREES)	RAINFALL CAPACITY (mm/hr)					
	150	200	250	300	350	400
2	57	43	36	30	23	23
3	68	51	41	34	29	26
5	74	63	49	41	37	31
10	110	86	68	57	52	43

### RELATIVE DISCHARGE X 10<sup>-6</sup>m<sup>3</sup> / s / m PER PROFILE

SLOPE (DEGREES)	CORRUGATED 16mm	TRUE OAK 21mm	TRUE OAK 'SUPER 5'	REV 5	REV 5 PLUS	REVKLIP 700	REVSPAN 700
1	103.3	286.1	1227.1	4018.5	5932.9	4974.0	1034.3
2	146.1	404.6	1736.2	5682.9	8390.4	7034.3	1462.8
5	231.0	639.8	2754.2	8985.6	13266.5	11122.3	2312.9
10	326.8	904.8	3882.4	12707.5	18761.6	15729.3	3270.9
15	400.2	1108.1	4752.9	15563.5	22978.2	19264.5	4006.0

## RAINWATER INTENSITY PER LOCATION

#### RAINFALL INTENSITY BY LOCATION (mm / hr)

Locality	Average recurrence (years)	
	Once in 20	Once in 100
<b>AUSTRALIAN CAPITAL TERRITORY</b>		
Canberra	143	193
<b>NEW SOUTH WALES</b>		
Albury	139	180
Broken Hill	143	219
Newcastle	226	316
Sydney	200	262
<b>NORTHERN TERRITORY</b>		
Alice Springs	166	239
Darwin	233	274
<b>QUEENSLAND</b>		
Brisbane	234	305
Cairns	229	278
Mackay	250	316
Townsville	235	300

#### RAINFALL INTENSITY BY LOCATION (mm / hr)

Locality	Average recurrence (years)	
	Once in 20	Once in 100
<b>SOUTH AUSTRALIA</b>		
Adelaide	125	187
Gawler	110	158
Mt Gambier	103	144
Murray Bridge	120	178
Yorketown	155	166
<b>TASMANIA</b>		
Hobart	85	116
Launceston	90	121
<b>VICTORIA</b>		
Ballarat	131	188
Geelong	102	144
Melbourne	132	187
Mildura	142	218

#### RAINFALL INTENSITY BY LOCATION (mm / hr)

Locality	Average recurrence (years)	
	Once in 20	Once in 100
<b>WESTERN AUSTRALIA</b>		
Albany	125	178
Broome	232	287
Bunbury	147	199
Geraldton	138	193
Perth	130	172

\*Rainwater Intensity Data obtained from the National Construction Code and the Bureau of Meteorology.

MASSSES

COLORBOND® STEEL AM100

0.48 BMT	
kg/lm	3.94
kg/m²	5.36

NEXTEEL™ AM100

0.48 BMT	
kg/lm	3.94
kg/m²	5.36

HERITAGE GALVANISED

0.48 BMT	
kg/lm	4.39
kg/m²	5.97

ZINCALUME® AM125

0.48 BMT	
kg/lm	3.86
kg/m²	5.25

NEXALUME™ AZ150

0.48 BMT	
kg/lm	3.86
kg/m²	5.25

FASTENER SPACING NON-CYCLONIC

As per NCC ABCB Housing Provisions Table 7.2.5, maximum roof lengths (m) for drainage measured from ridge to gutter, no allowance has been made for penetrations or water diversion.

CREST FASTENER LOCATION

6 fasteners per sheet - End Supports



3 Fasteners per Sheet - Internal Supports




VALLEY FASTENER LOCATION

5 fasteners per sheet - End Supports



3 Fasteners per Sheet - Internal Supports



NOTE: Side lap fasteners are optional when using 5 fasteners per sheet, but are a requirement when only using 3 fasteners per sheet for valleys.

SUGGESTED NON-CYCLONIC PIERCE FIXING


SUGGESTED TRUE OAK SUPER 5 NON CYCLONIC PIERCE FIXING

TYPE	FIXING TO STEEL (UP TO 1.9mm)	FIXING TO STEEL (2.0mm - 3.5mm)	FIXING TO METAL BATTENS (0.55 - 1.0mm)	FIXING TO TIMBER
Crest Fixed	Self Drilling 12×55mm Hex Head HiGrip w/- Seal	Self Drilling 12×55mm Hex Head HiGrip w/- Seal	M6-11×65mm Roof Zips	M6-11×65mm Roof Zips
Valley Fixed	M6-11×25mm or 10-16×16mm Metal Tek Hex Head with Seal	Self Drilling 12×55mm Hex Head HiGrip w/- Seal	M6-11×25mm or 10-16×16mm Metal Tek Hex Head with Seal	M6-11×25mm Hex Head with Seal or T17×25mm Hex Head

NOTE: After exposure of cladding to extreme wind event, it is recommended that inspection to be performed to confirm cladding integrity.



MECHANICAL CURVING

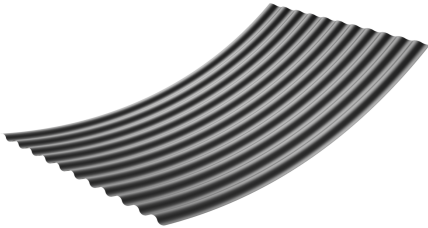

True Oak Super 5 can be mechanically curved in the factory, however the following should be noted:

- Cover is 735mm
- Concave and Convex Shapes Only
- Minimum Radius of 2000mm
- Bullnose Curving is not Available

STANDARD SPECIFICATION

COLORBOND® STEEL AM100

RELEVANT FOR COLORBOND® STEEL, COLORBOND® MATT STEEL PRODUCTS

Steel base thickness (0.48) with an Aluminium Zinc Magnesium Alloy Coated Steel with Activate® Technology Coating. COLORBOND® Steel AM100 Substrate compliance AS 1397:2021, and Paint Finish Substrate compliance AS/NZS 2728:2013 Type 3.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel with Activate® Technology - AS 1397:2021
COATING	AM100 = 100g per m² Minimum Metallic Coating Mass
PRIMER	Nominal 5µm Universal Corrosion Inhibitive Primer
PAINT	Nominal 20µm Finish Coat AS/NZS 2728:2013 Type 3
PROTECTIVE PLASTIC	Nominal 50µm CORSTRIP® (if required)

COLORBOND® STEEL AM150

RELEVANT FOR COLORBOND® STEEL ULTRA PRODUCTS

Steel base thickness (0.48) with an Aluminium Zinc Magnesium Alloy Coated Steel with Activate® Technology Coating. COLORBOND® AM150 Ultra Steel Substrate compliance AS 1397:2021, and Paint Finish Substrate compliance AS/NZS 2728:2013 Type 3.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel with Activate® Technology - AS 1397:2021
COATING	AM150 = 150g per m² Minimum Metallic Coating Mass
PRIMER	Nominal 5µm Universal Corrosion Inhibitive Primer
PAINT	Nominal 20µm Finish Coat AS/NZS 2728:2013 Type 3
PROTECTIVE PLASTIC	Nominal 50µm CORSTRIP® (if required)

NEXTEEL™ AM100

RELEVANT FOR NEXTSTAR™, NEXTSTAR™ MATT STEEL PRODUCTS

Steel base thickness (0.48) with an Aluminium Zinc Magnesium Alloy Coated Steel Coating. NEXTEEL™ AM100 Steel Substrate compliance AS 1397:2021, and Paint Finish Substrate compliance AS/NZS 2728 Type 4.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
COATING	AM100 = 100g per m² Minimum Metallic Coating Mass
PRIMER	Nominal 5µm Polyester
PAINT	Nominal 20µm Advanced Durability Polyester AS/NZS 2728 Type 4
PROTECTIVE PLASTIC	Nominal 50µm NextSTRIP (if required)

NEXTEEL™ AM150

RELEVANT FOR NEXTSTAR™ ULTRA STEEL PRODUCTS

Steel base thickness (0.48) with an Aluminium Zinc Magnesium Alloy Coated Steel Coating. NEXTEEL™ AM150 Steel Substrate compliance AS 1397:2021, and Paint Finish Substrate compliance AS/NZS 2728 Type 4.

SUBSTRATE	Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
COATING	AM150 = 150g per m² Minimum Metallic Coating Mass
PRIMER	Nominal 5µm Polyester
PAINT	Nominal 20µm Advanced Durability Polyester AS/NZS 2728 Type 4
PROTECTIVE PLASTIC	Nominal 50µm NextSTRIP (if required)

STANDARD SPECIFICATION

ZINCALUME® AM125

Steel base thickness (0.48) with an Aluminium Zinc Magnesium Alloy Coated Steel Coating. Zincalume AM125 Substrate compliance AS 1397:2021, 125g per square metre minimum Metallic Coating Mass.

- SUBSTRATE Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
- COATING AM125 = 125g per m² Minimum Metallic Coating Mass

NEXALUME™ AZ150

Steel base thickness (0.48) with a Hot-Dipped Aluminium Zinc Magnesium Alloy Coating. Nexalume AZ150 Substrate compliance AS 1397:2021, 150g per square metre minimum Metallic Coating Mass.

- SUBSTRATE Hot-Dipped Aluminium Zinc Magnesium Alloy Coated Steel - AS 1397:2021
- COATING AZ150 = 150g per m² Minimum Metallic Coating Mass

MARINE CLASSIFICATION

- Class 1 (ISO 9223 Category C1): Rural areas far inland and remote from marine or industrial influence
- Class 2 (ISO 9223 Category C2): Inland areas remote from the coast or areas of pollution
- Class 3 (ISO 9223 Category C3): Coastal areas with low salinity
- Class 4 (ISO 9223 Category C4): Severe marine which begins between 100m - 400m from breaking surf or 100m from calm marine.
- Class 5 (ISO 9223 Category C5): Very severe marine: Close to breaking surf, typically 0 to 100m from breaking surf/exposed marine.
- Class CX: Extreme (as per AS 4312:2019): Rare classification, reserved for offshore structures and the most severe sea conditions

ISO 9223:2012

Corrosion of metals and alloys — Corrosivity of atmospheres — Classification, determination and estimation.